

Oil and Water-Soluble Fluids



Features Included:

- Drop-in stainless coil design
- Hermetically sealed scroll compressor
- NEMA 1 standard e-box
- Digital temperature controller
- Fused disconnect
- Stainless submersible heat exchanger
- Vertical air discharge
- Phase monitor
- Cleanable air filters
- Textured RAL 7035 powder-coat cabinet
- Built to meet UL 1995
- 18 month parts and labor warranty
- 24/7 service and support

Designed and Assembled in the USA


Standard Options *

- Remote digital display
- Voltage options
- Lifting frame
- Service/maintenance packages

* These are pre-designed option packages. Virtually any configuration is available but will effect delivery.

D Series

D Series

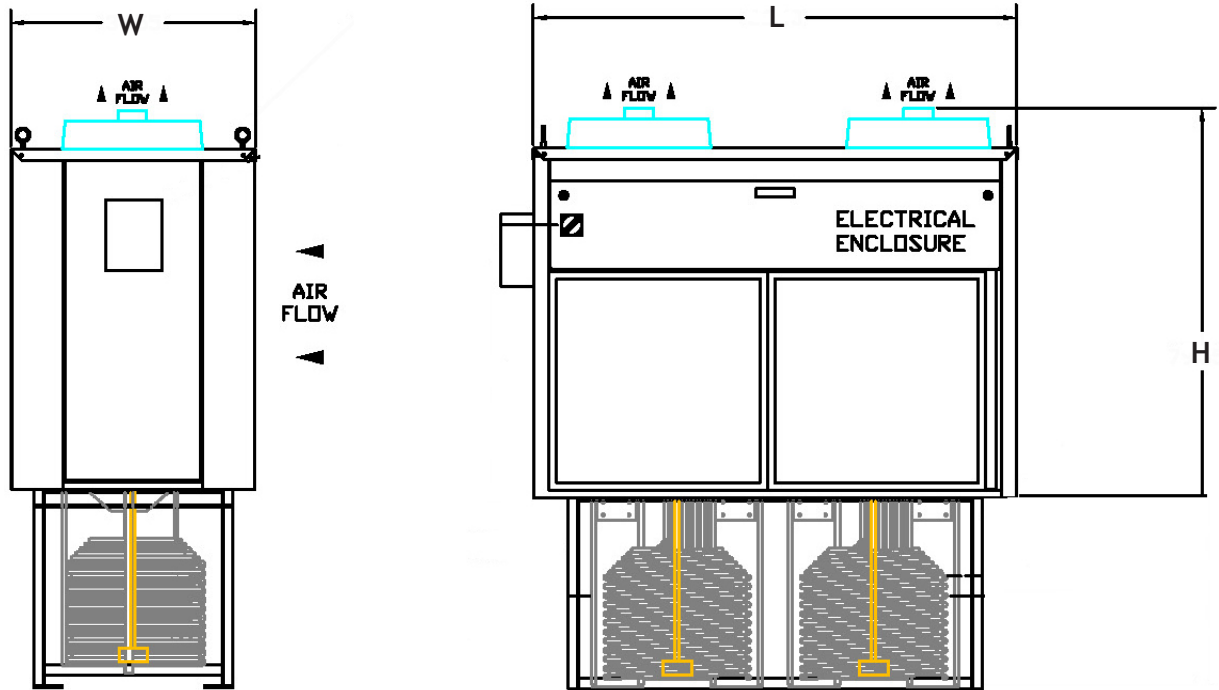

Model	Electrical	Dimensions L x W x Cabinet Ht	Min. Coil Frame Depth - WATER	FLA Water	Water Soluable BTU/HR at 95 Ambient	Min. Coil Frame Depth - OIL	FLA Oil	Oil Soluable BTU/HR at 95 Ambient
1000	460/3/60	36*25*40	10	4.4	12,000	13.5	5.5	10,800
	230/3/60	36*25*40	10	8.2	12,000	13.5	10.4	10,800
2000	460/3/60	36*25*40	10	10.4	24,000	13.5	11.5	21,600
	230/3/60	36*25*40	10	21.7	24,000	13.5	23.9	21,600
3000	460/3/60	35*35*54	16.5	10.4	36,000	20	11.5	32,400
	230/3/60	35*35*54	16.5	21.7	36,000	20	23.9	32,400
5000	460/3/60	35*35*54	21.5	18.4	60,000	25	19.5	54,000
	230/3/60	35*35*54	21.5	35.3	60,000	25	37.5	54,000
7500	460/3/60	67*35*54	21.5	24.2	90,000	25	26.4	81,000
	230/3/60	67*35*54	21.5	46.9	90,000	25	51.3	81,000
10000	460/3/60	67*35*54	21.5	28.6	120,000	25	30.8	108,000
	230/3/60	67*35*54	21.5	55.8	120,000	25	60.2	108,000
15000	460/3/60	50*46*74	25	40.7	180,000	32.5	42.9	162,000
	230/3/60	50*46*74	25	79.8	180,000	32.5	84.2	162,000
20000	460/3/60	73*67*54	21.5	52.2	240,000	25	56.6	216,000
30000	460/3/60	84*48*74	25	77.3	360,000	32.5	81.7	324,000

Alternate voltages available. Please call for specifications.

Rating provided based on 95° F ambient and 85° F fluid setpoint. Operating ranges provided below but may affect capacity.

Fluid Temperature Range +50° F to +90° F.

Indoor Ambient Temperature Range +50° F to +95° F.

Lower fluid temp and higher ambient temp designs available upon request.



1-800-YOU-KOOL

2625 Emerald Dr., Kalamazoo, MI 49001
Phone 269-349-6800 • Fax 269-349-1493

salesdept@dimplexthermal.com

www.koolantkoolers.com

rev 10/2013